



Bolts

Bolts

680 Patio Bolt



The Lockwood 680 Patio Bolt is a strong, heavy duty, surface mounted product designed to improve security in a range of residential sliding and hinge door applications.

It is easy to install and has been designed to suit a wide range of aluminium and timber sliding patio and hinge door applications.

It is offered in gold, chrome plate, satin chrome pearl and a range of powdercoat finishes.

Features and Specifications

Standards

Exceeds Australian Standard 4145.2-2008, Mechanical Locksets for Doors and Windows in Buildings, to Level SL6 – with standard length bolt, to Level SL4 – with accessory extended length bolt.

Case

High purity high pressure zinc alloy.

Bolt

Steel, zinc plated.

Bolt Head

Powder coat models:

Moulded from ABS polymer.

Plated models:

Bright chrome plated high pressure zinc alloy.

Fixing

Concealed fixing by Phillips head screws.

Cylinder

Solid brass 5 pin cylinder.

Keying

Standard Keying

- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P


Restricted Special Keying

- Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.



Bolts

Barrel Bolts

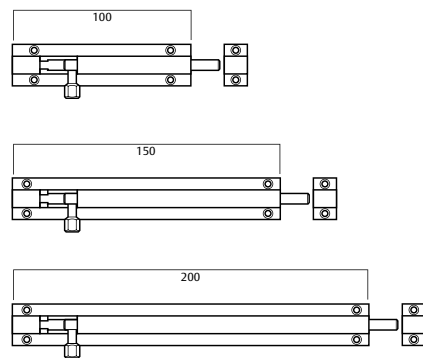


Features and Specifications

- Brass barrel bolts
- Available in three lengths: 100, 150 and 200mm
- Visible fixing
- Individually display packed, complete with fixing screws

Bolts

Flush Bolts

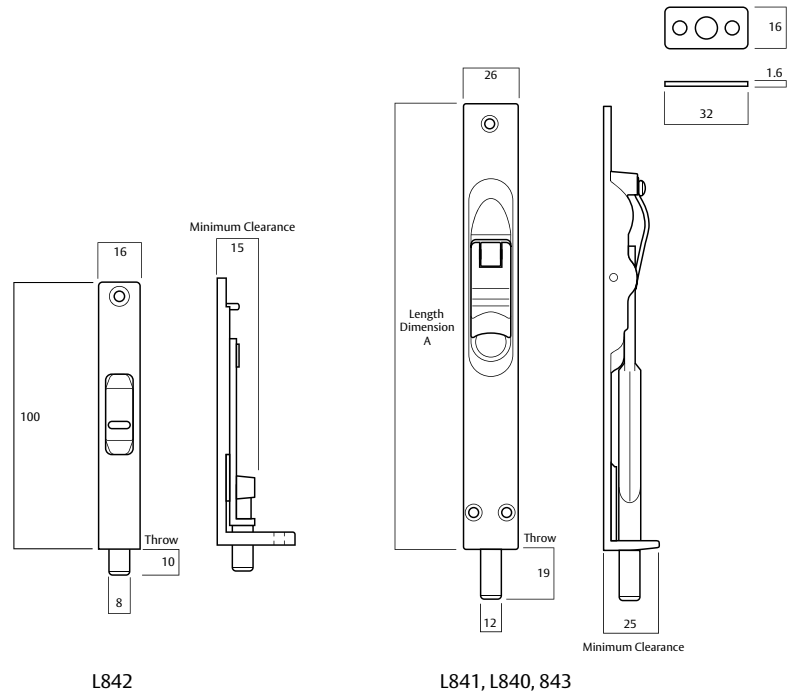

L842

Designed for use on small timber doors and cupboards, the L842 is a flush mounted bolt incorporating a slide action to throw or withdraw the bolt. Available in 100mm length.

L841 and L840

The L841 and L840 are flush mounted bolts incorporating a toggle action to throw or withdraw the bolt. Available in 150 or 200mm lengths, dimension A (nominal length).

843

The 843 employs the L840 body with bolt extending to 600mm overall, using a 6.5mm diameter steel threaded rod, brass tip and lock nuts.

Features and Specifications

Materials

Zinc alloy casting.

Packaging

L840, L841 and L842 are individually display packed, complete with fixing screws.
843 supplied in trade pack.

Bolt Throw

L841, L840, 843 Toggle Action, L842 Slide Action.

Application

Designed for timber doors.